


160

ASEPTIC BAG FILLER

Based on TORRfiller™ 145 and 170 automatic web bag fillers that have proven performance with over 30 installations in high output, 24/7 operations. The 160 shares similar technology, web-feed of bags, Allen-Bradley PLC control system, Festo pneumatic valves and actuators, and TORR proven automatic bag into box loading systems.

Sterile Filling Features:

- Closed transfer low acid fill head
- Steam sterilize each bag to 145°C for 2 seconds
- No sterilant spray
- Automatic CIP & SIP
- Fills 32mm double membrane fill glands

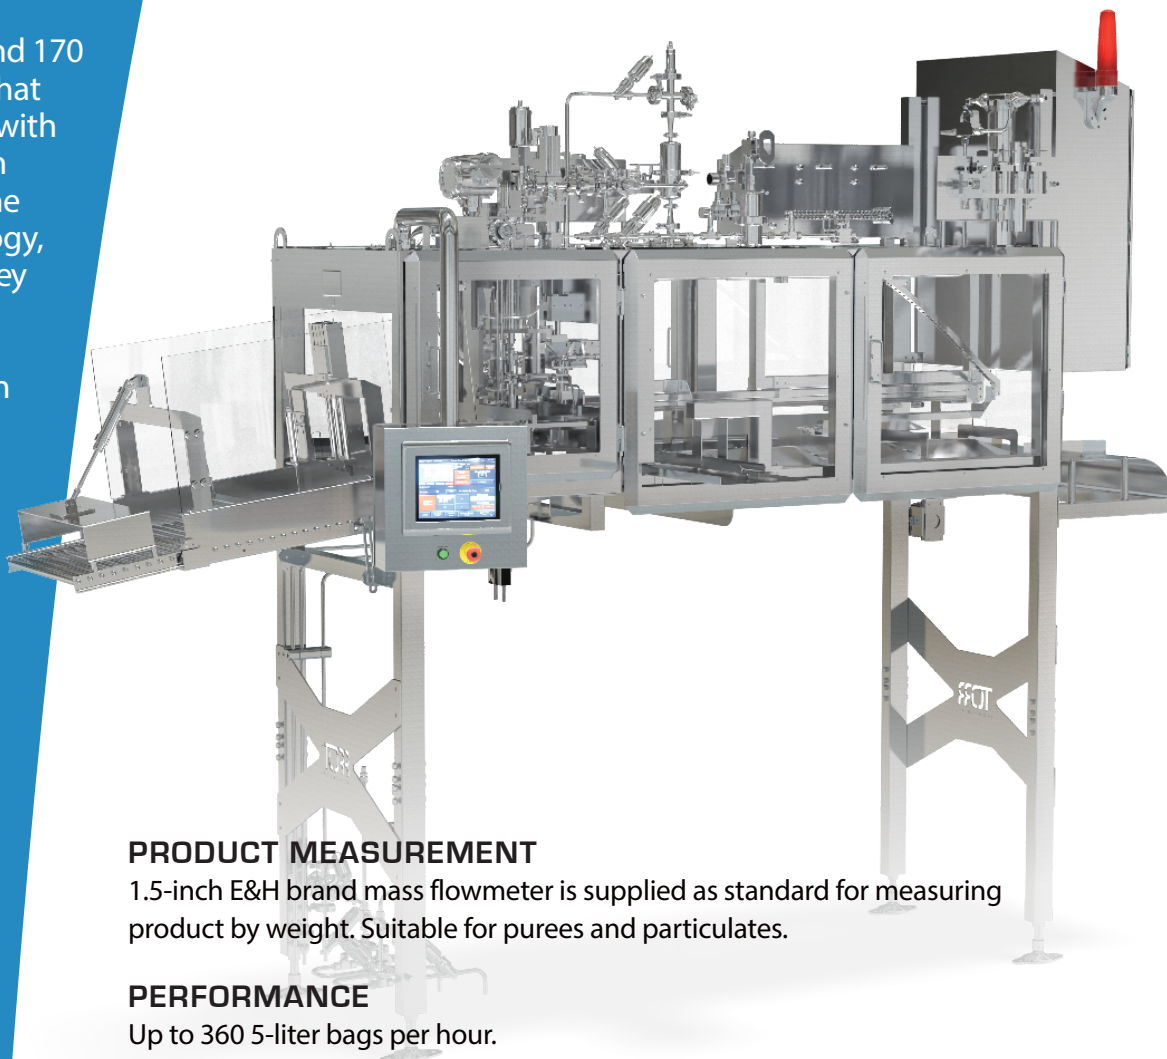

PRODUCT MEASUREMENT

1.5-inch E&H brand mass flowmeter is supplied as standard for measuring product by weight. Suitable for purees and particulates.

PERFORMANCE

Up to 360 5-liter bags per hour.

UTILITIES

480 VAC 50-60Hz single phase @ 30 amps. 220VAC optional.

AIR FOR FILLER OPERATION

10 CFM @ 80 PSI. (280 lpm @ 6 bar)

STEAM SUPPLY

Filtered, clean culinary grade @ 60 PSI. (4 bar)



For a quote or more info please contact:

Chris Rutter
chrisr@torrindustries.com
530.247.6909

TORR Industries, Inc
California, USA



Made in Redding
California, USA.

160

ASEPTIC BAG FILLER

For a quote or more info please contact:

Chris Rutter
chrisr@torrindustries.com
530.247.6909

TORR Industries, Inc
California, USA

TORR INDUSTRIES

